PCRD **Radiation Damper for PC fans** (Fits PC80X, PC110X, PC150 and PCD110H)

Dimensions (PC80X, PC110X, PC150 or PCD110H with PCRD)

11-3/8" x 10-1/2" x 8-5/8" high 6" diameter (standard)




13" x 14"

Specifications

- 3-hour rating ceiling radiation dampers
- UL Listed Link (165°F Standard) •
- UL Approved flexible fire blanket •
- Ceramic fiber with fiberglass cover •
- Roll-formed frame 22 g. galvanized steel •



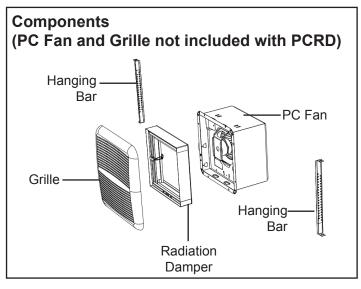

The chart below indicates with plug-&-play or other PC accessories can be used with the PCRD:

	Standard Grille	PCLK	РСМК	PCHS	PCSC	PC3S	PCMG
PCRD	\checkmark	-	-	\checkmark	~	\checkmark	~

ACCESSORY MODEL	1	2	3	4	5	REMARKS
PROJECT:			TRACT	OR: _		

LOCATION:	REVISION DATE:	
FORM NO.:	SUBMITTED BY:	DATE:
ENGINEER:	APPROVED BY:	DATE:
		27.1.2.

For more information contact us at www.solerpalau-usa.com or 1.800.961.7370 for additional submittal drawings.

S&P will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.

